

Model MS2600E

High Resolution ER Transmitter 4-20 mA Analog Output



Metal Samples new compact MS2600E ER Transmitter (ERT) measures all types of electrical resistance (ER) corrosion probes. The new high-resolution, 16-bit measurement provides faster response, obtaining corrosion rates in hours instead of days. The transmitter can be remote or direct-mounted (shown).

The transmitter is available in a weather-proof (IP66) stainless steel enclosure designed for applications which do not permit aluminum enclosures (such as offshore environments or Zone 0 hazardous areas).



*MS2600E direct mounted
to a retrievable probe*

The MS2600E is completely loop-powered, so installation is simple. A two-wire connection is all that is required for both instrument power and data transmission. Setup is also simple, using a set of switches to select the probe type to be measured.

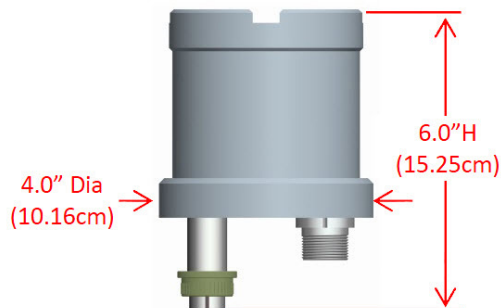

Metal Samples Company

A Division of Alabama Specialty Products, Inc.

152 Metal Samples Rd., Munford, AL 36268 Phone: (256) 358-4202 Fax: (256) 358-4515

E-mail: msc@alspi.com Internet: www.metalsamples.com

Houston Office: 6327 Teal Mist Lane, Fulshear, TX 77441 Phone: (832) 451-6825

Technical Specifications

Model

MS2600E - High Resolution ER 4-20mA Transmitter

Physical Data

Instrument Weight: 3.70 lb. (1.68 Kg)
Total Weight w/ Accessories: 5.76 lb. (2.61 Kg)
Instrument Dimensions: 6.0"H x 4.0"Dia
(15.25cm H x 10.16cm Dia)

Operating Temperature: -40° to 158°F (-40° to 70°C)
Storage Temperature: -40° to 176°F (-40° to 80°C)
Enclosure Material: 316 Stainless Steel
Enclosure Rating: IP66
Mounting Specifications: Direct probe mount (standard)
May be pole mounted using optional hardware
(Up to a 2.5" (6.35cm) Dia. pole)

Performance Data

Measurement Type: ER measurement using any standard ER probe type
(Wire Loop, Tube Loop, Cylindrical, Flush, Strip, etc.)
Range: 0-100% of probe life
Resolution: 0.0015% of Probe Life (16-bit)
Cycle Time: 1 Minute

Electrical Data

Power Requirements: 11 to 28 VDC
Maximum Probe Cable Distance: 30 ft (9.1 m)
Output Specifications: 4-20mA Current Loop Output

Hazardous Location Certifications

Europe and Worldwide
(ATEX and IECEx) II 1 G Ex ia IIC T4 Ga
- 40°C ≤ Tamb ≤ + 70°C
Ex ia IIC T4 Ga
- 40°C ≤ Tamb ≤ + 70°C

ATEX Certificate No: **ITS14ATEX27981X**
IECEx Certificate No: **IECEx ITS 14.0010X**

USA and Canada
(ETL) Ex ia IIC T4 Ga
Class I, Division 1, Groups A, B, C & D, T4
Class I, Zone0, AEx ia IIC T4 Ga
-40° C ≤ Ta ≤ +70° C

Included Accessories

33' (10 meters) Current Loop Wiring Harness, Meter Prover, Operations Manual

Optional Accessories

Probe Extension Cable, Remote Mounting Hardware