

Model MS2800E

CORR VELOX

Ultra Resolution ER Transmitter RS-485 Modbus Output



Metal Samples' new compact MS2800E **CORR VELOX** ER Transmitter measures all types of electrical resistance (ER) corrosion probes. The ultra high-resolution, 20-bit measurement provides faster response, obtaining corrosion rates in hours instead of days. The transmitter can be remote or direct-mounted (shown).

The transmitter is available in a weather-proof (IP66) stainless steel enclosure designed for applications which do not permit aluminum enclosures (such as offshore environments or Zone 0 hazardous areas). Alternatively, a weather-proof (IP66) and explosion proof cast aluminum enclosure is also available.

The **CORR VELOX** transmitter offers simple installation and robust RS-485 Modbus communication, allowing up to 32 units to be connected in series (daisy-chained) on a single line. Setup is also simple, using a set of switches to select the probe type to be measured, address, and other options.



MS2800E direct mounted
to a retrievable probe

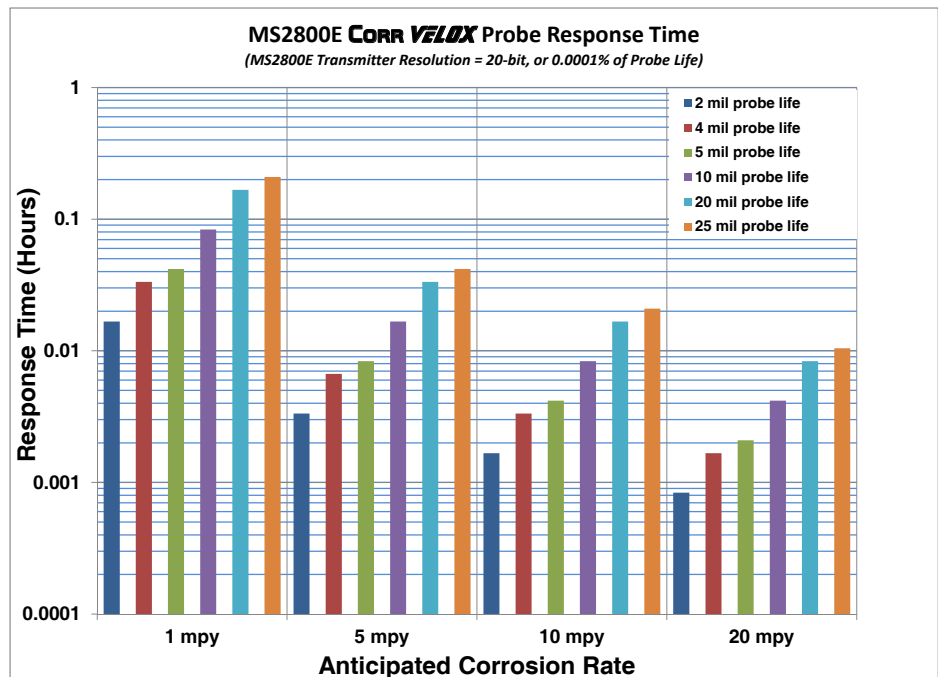

Metal Samples Company

A Division of Alabama Specialty Products, Inc.

152 Metal Samples Rd., Munford, AL 36268 Phone: (256) 358-4202 Fax: (256) 358-4515

E-mail: msc@alspi.com Internet: www.metalsamples.com

Houston Office: 6327 Teal Mist Lane, Fulshear, TX 77441 Phone: (832) 451-6825


Technical Specifications

Model

MS2800E - **CORR VELOX** Ultra-High Resolution ER RS-485 Modbus Transmitter

Physical Data

Instrument Weight: 3.70 lb. (1.68 Kg)
Total Weight w/ Accessories: 5.76 lb. (2.61 Kg)
Instrument Dimensions: 6.0"H x 4.0"Dia (15.25cm H x 10.16cm Dia)

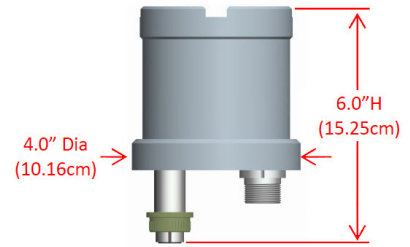

Operating Temperature: -4° to 158°F (-20° to 70°C)
Storage Temperature: -40° to 176°F (-40° to 80°C)
Enclosure Material: 316 Stainless Steel
Enclosure Rating: IP66
Mounting Specifications: Direct probe mount (standard)
May be pole mounted using optional hardware
(Up to a 2.5" (6.35cm) Dia. pole)

Performance Data

Measurement Type: ER measurement using any standard ER probe type
(Wire Loop, Tube Loop, Cylindrical, Flush, Strip, etc.)
Range: 0-100% of probe life
Resolution: 0.0001% of Probe Life (20-bit)
Cycle Time: 75 Seconds

Electrical Data

Power Requirements: 10 to 28 VDC
Maximum Probe Cable Distance: 30 ft (9.1 m)
Output Specifications: RS-485 Modbus, RTU or ASCII Protocol (Switch Selectable)
2400 / 4800 / 9600 / 19.2K Selectable Baud
32 Maximum Units (Addresses 1 to 32)

Hazardous Location Certifications – Intrinsic Safety

USA / Canada Conforms to ANSI/UL Std. 60079-0, 60079-11, 61010-1
CAN/CSA Std. E66079-0, E60079-11 & CAN/CSA C22.2 No. 61010-1
Class I, Zone0, AEx ia IIC T4 Ga
Zone 20, AEx ia IIIC T130° C Da
-20° C ≤ Ta ≤ +70° C

Europe and Worldwide (ATEX and IECEx) II 1 G Ex ia IIC T4 Ga
II 1 D Ex ia IIIC T130°C Da
- 20°C ≤ Ta ≤ + 70°C
ATEX Certificate No: **ITS14ATEX28092X**
IECEx Certificate No: **IECEx ITS 14.0052X**

X - see Special Conditions in Operator's Manual.

Included Accessories

33' (10M) Wiring Harness, Meter Prover, Operations Manual

Optional Accessories

Probe Extension Cable, Remote Mounting Hardware