


## ASTM F-3 Test Apparatus - Gasket Testing Assemblies

P/N TF2436




ASTM F36 Test Cell for compressibility and recovery of gasket materials. Fixture shipped partially assembled.

P/N TF2401

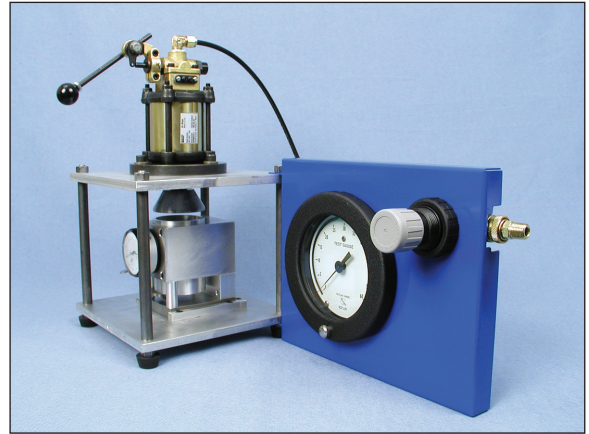

ASTM F36 Test Cell with Test Panel. This is the complete assembly for the ASTM F36 test method. Assembly is ready for attachment to pressure supply.

P/N TF2425

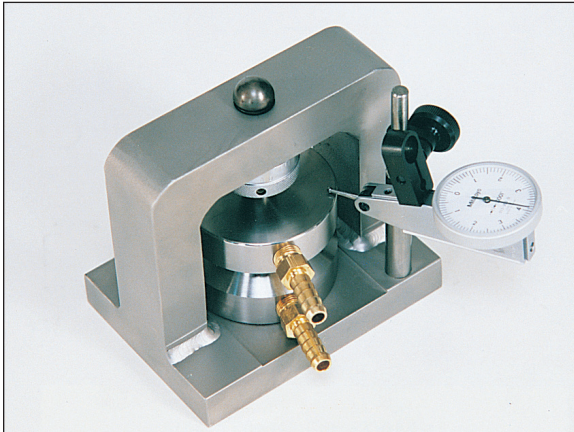

ASTM F37 (Method A) Test Cell is used to evaluate the fluid sealing properties of gasket materials.

P/N TF2402



ASTM F37 (Method A) Test Cell with Test Panel. This is the complete assembly for the ASTM F37 (A) test method. Assembly is ready for attachment to pressure supply.

P/N TF2421




ASTM F37 (Method B) Test Cell is used to evaluate the gas sealability of gasket materials. This test cell can also be used for evaluating liquid sealability.

P/N TF2403




ASTM F37 (Method B) Test Cell with Test Panel. This is the complete assembly for the ASTM F37 (B) test method. Assembly is ready for attachment to pressure supply.

## P/N TF2406

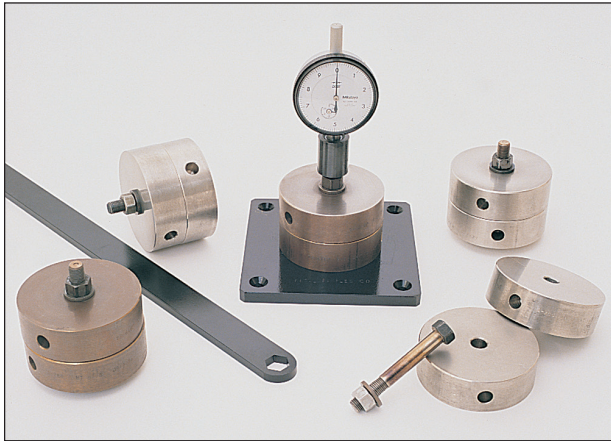

**ASTM F38 Method B Test Assembly** includes all equipment necessary for Creep Relaxation testing. Yokes for the ASTM F607 Test apparatus are also available.

## P/N TF2405

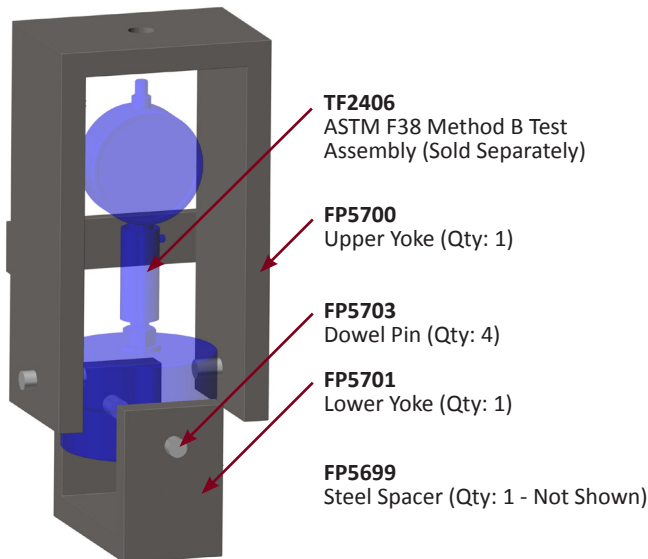

**ASTM F38 Method B Bolt Calibration Apparatus**

### Part # TF2406 ASTM F38 Method B Test Assembly

Consists of Dial Indicator (1), Dial Indicator Adapter (1), Mounting Plate (1), Custom Wrench (1), C4140 Steel Platen (10), C4140 Preconditioned & Calibrated Bolt (5), C4140 Hex Nut (5), and C4140 Washer (5)

### Part # TF2405 ASTM F38 Method B Bolt Calibration Apparatus

Consists of Upper Yoke (1), Lower Yoke (1), Steel Spacer (1), and Dowel Pins (4)

### Spare Parts


Part #	Item
FP5759	Dial Indicator
FP5704	Dial Indicator Adapter
FP5760396	Preconditioned & Calibrated Bolt Set (Includes Bolt with Pin, Hex Nut, and Washer) - C4140 Steel
FP5708396	Platen - C4140 Steel
FP5705396	3/8-24 Hex Nut - C4140 Steel
FP5706396	3/8" Washer C4140 Steel
FP5707396	3/8-24 x 3" Bolt & Pin Assembly, Uncalibrated - C4140 Steel
FP5760608	Preconditioned & Calibrated Bolt Set (Includes Bolt with Pin, Hex Nut, and Washer) - Inconel 718
FP5709608	Platen - Alloy I718
FP5711608	3/8-24 Hex Nut - Alloy I718
FP5712608	3/8" Washer - Alloy I718
FP5710608	3/8-24 x 3" Bolt & Pin Assembly, Uncalibrated - Alloy I718
FP5713	Mounting Plate
FP5714	Custom Wrench
FP5700	Upper Yoke
FP5701	Lower Yoke
FP5703	Dowell Pins
FP5699	Steel Spacer



## Fluid Sealing Pressure Gasket Assembly

### P/N TF2408

This flanged, carbon steel, pressure gasket test fixture (TF2408) is used for evaluating fluid sealing properties. The fixture meets the Fluid Sealing Association's **FSA-NMG-2040** specifications. A stainless steel version of this fixture is also available.



### Metal Samples Company

A Division of Alabama Specialty Products, Inc.

152 Metal Samples Rd., Munford, AL 36268 Phone: (256) 358-4202 Fax: (256) 358-4515

E-mail: [msc@alspi.com](mailto:msc@alspi.com) Internet: [www.metalsamples.com](http://www.metalsamples.com)

Houston Office: 6327 Teal Mist Lane, Fulshear, TX 77441 Phone: (832) 451-6825