


# Hydraulic Hollow Plug Assemblies

## for High Pressure Hydraulic Access Systems


The plug assembly screws into the access fitting body and seals the bore of the fitting to contain line pressure. Hollow plugs are used to mount corrosion monitoring devices that require wired connections: Electrical Resistance (ER), Linear Polarization Resistance (LPR) probes, and multiple specialized probes.

Hollow Plug: Overall length - 5.5"/140mm      Weight - 2 lbs/0.9kg

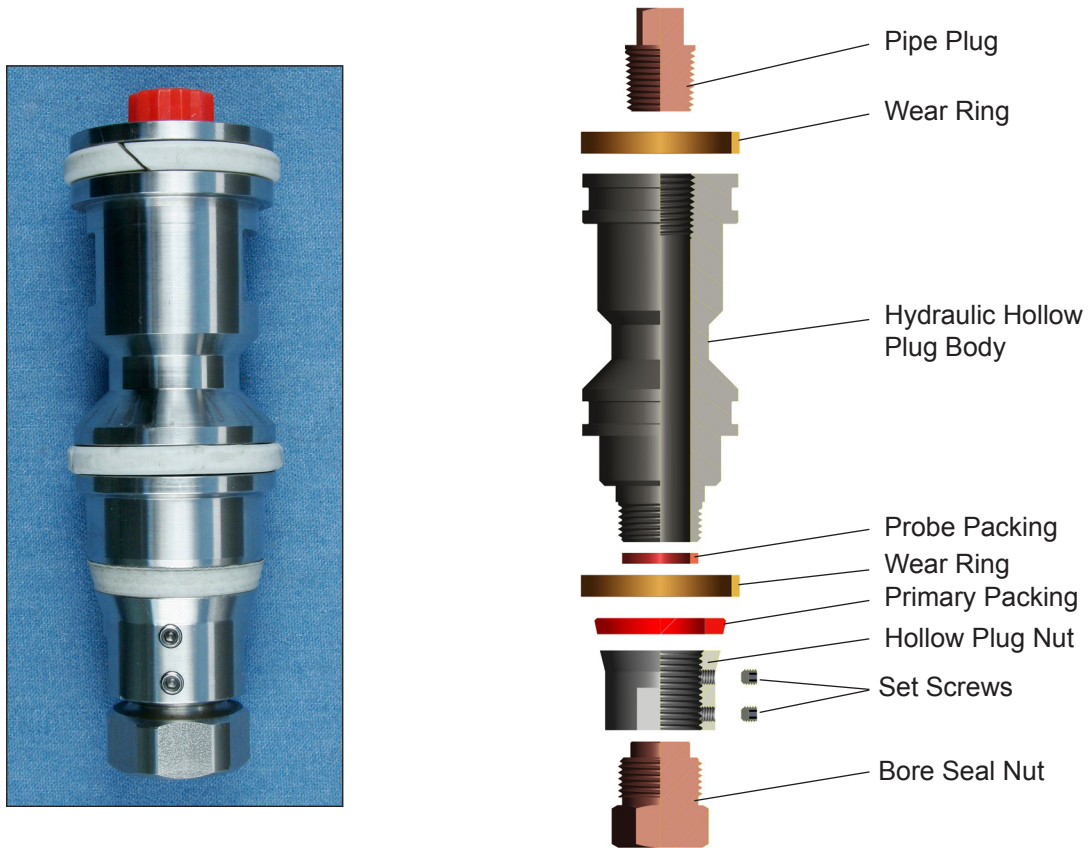

**Hydraulic Hollow Plug Assembly  
HA700961158**

Description	Part No.	Material
Hydraulic Hollow Plug Body	HA700312158	316 SS
Pipe Plug	HA700697159	316 SS
Wear Ring (2)	PR7211785	Glass filled PTFE
Primary Packing	HA700266785	Glass filled PTFE
Hollow Plug Nut	HA700302158	316 SS
Set Screw (2)	09158E1032ST0187	316 SS
Probe Packing	HA700277785	Glass filled PTFE
Bore Seal Nut	HA700311158	316 SS



**Metal Samples Company**

A Division of Alabama Specialty Products, Inc.

152 Metal Samples Rd., Munford, AL 36268 Phone: (256) 358-4202 Fax: (256) 358-4515

E-mail: [msc@alspi.com](mailto:msc@alspi.com) Internet: [www.metalsamples.com](http://www.metalsamples.com)

Houston Office: 6327 Teal Mist Lane, Fulshear, TX 77441 Phone: (832) 451-6825