


Hydraulic Hollow Plug Assemblies

for High Pressure Hydraulic Access Systems

The plug assembly screws into the access fitting body and seals the bore of the fitting to contain line pressure. Hollow plugs are used to mount corrosion monitoring devices that require wired connections: Electrical Resistance (ER), Linear Polarization Resistance (LPR) probes, and multiple specialized probes.

Hollow Plug: Overall length - 5.5"/140mm Weight - 2 lbs/0.9kg

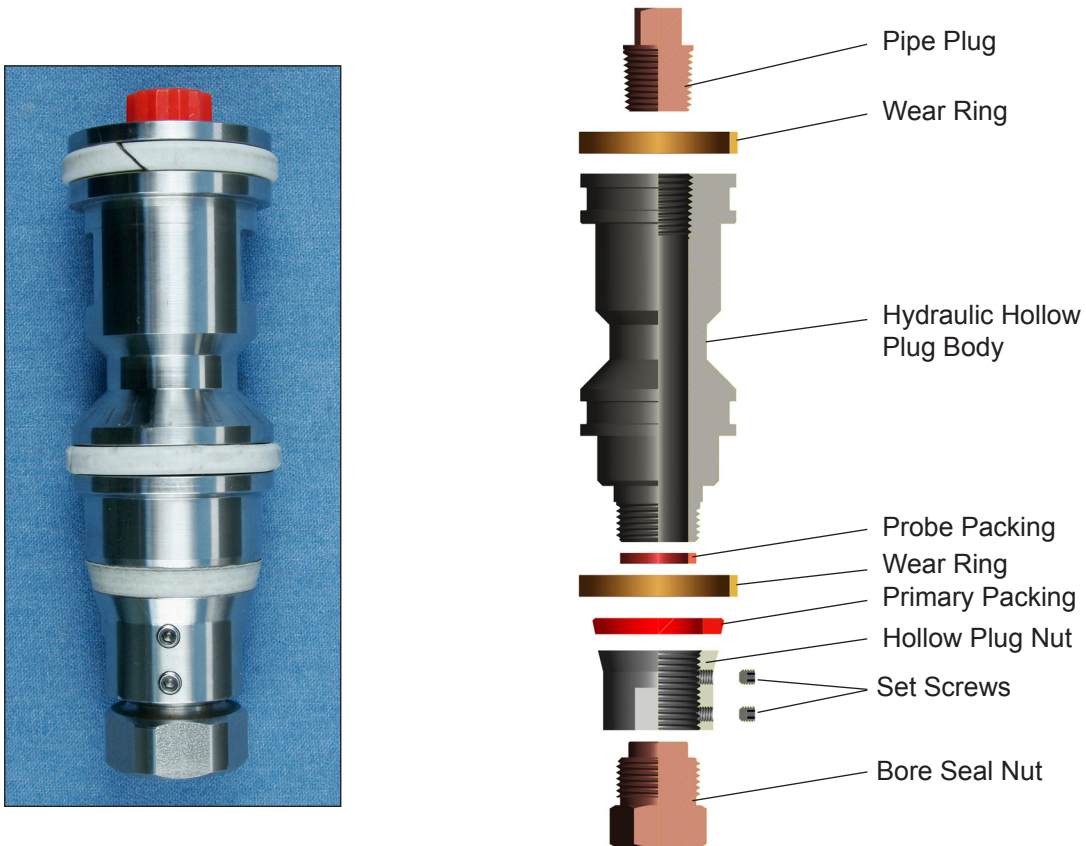

**Hydraulic Hollow Plug Assembly
HA700961158**

Description	Part No.	Material
Hydraulic Hollow Plug Body	HA700312158	316 SS
Pipe Plug	HA700697159	316 SS
Wear Ring (2)	PR7211785	Glass filled PTFE
Primary Packing	HA700266785	Glass filled PTFE
Hollow Plug Nut	HA700302158	316 SS
Set Screw (2)	09158E1032ST0187	316 SS
Probe Packing	HA700277785	Glass filled PTFE
Bore Seal Nut	HA700311158	316 SS

