

Model MS4500E-HC

High-Resolution ER Data Logger


The MS4500E-HC is a hand-held corrosion meter powered by a high-capacity battery, which is capable of measuring and storing data from all types of electrical resistance (ER) corrosion probes. The instrument is light weight, microprocessor-based, and features a simple, menu-driven interface using a keypad and a backlit graphical LCD display.

Corrosion rate measurements are made using the electrical resistance method. Essentially, the instrument measures the resistance of the probe element which changes over time, as metal loss occurs. The rate of change is directly proportional to corrosion rate. This method finds a wide variety of applications since it can be used in conductive and nonconductive environments such as petroleum, chemical, water, soil, or even atmosphere. The new high-resolution measurement of the MS4500E-HC detects smaller increments of metal loss, providing faster response than traditional ER instruments (obtaining corrosion rates in hours instead of days). Additionally, it has been designed to work with high temperature probes and with longer extension cables than its predecessors.

After taking a reading, the instrument displays metal loss in mils and corrosion rate in mils per year (mpy). The reading can then be stored to memory or discarded. All stored readings are automatically time and date stamped. Readings are stored to non-volatile Flash memory which retains data without the need for a battery backup.



Probe shown in photo not included with corrosion meter

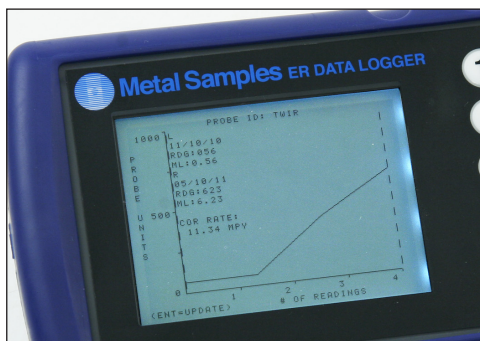

On-screen charting



Transfer data directly to USB Flash drive

The MS4500E-HC can store 16,000 readings per probe on up to 250 different probes (4 million total). Stored data can be downloaded directly to a non-certified USB Flash drive in non-hazardous areas or to a certified USB Data Transfer Unit in hazardous areas. Data can also be downloaded to a PC through a certified USB Barrier in non-hazardous areas. Data can be opened and charted using the provided Corrosion Data Management software, or can be imported into any standard data analysis (spreadsheet) program such as Microsoft Excel. Data can also be reviewed and charted on the instrument's LCD display for quick reference.

Technical Specifications

Model

MS4500E-HC - Handheld ER Corrosion Data Logger

Physical Data

Instrument Weight*: 2.21 lb. (1.00 kg)
Total Weight w/ Case & Accessories: 7.46 lb. (3.38 kg)
Instrument Dimensions*: 8.75"L x 4.54"W x 2.20"D (21.77cm x 11.53cm x 5.59cm)
Carrying Case Dimensions: 14.50"L x 11.38"W x 5.88"D (36.83cm x 28.89cm x 14.92cm)
Operating Temperature: -4° to 158°F (-20° to 70°C)
Storage Temperature: -40° to 158°F (-40° to 70°C)

* Includes protective boot.

Performance Data

Measurement Type: ER measurement using any standard ER probe types
Preferred probe types: Cylindrical, Flush (Large)
Compatible probe types: Tube Loop, Wire Loop, Flush (Small)
Range: 0 - 25,000 probe life units (displayed as 0.00 to 1000.00 PLU's in 0.04 increments).
Resolution: 0.004% of Probe Life
Repeatability: ± 0.1% of Full Scale

Electrical Data

Power Requirements: Two 'C' size 3.6V Lithium Batteries (Xeno Energy XL-145F or Tadiran TL4920)
Maximum Probe Cable Distance: 200 ft (61 m)
Download Method: Non-hazardous area: Directly to USB Flash drive
or to PC through certified USB Barrier
Hazardous area: Directly to certified USB Data Transfer Unit

Hazardous Location Certifications – Intrinsic Safety

USA / Canada For use in Class I Zone 0 AEx ia [ia] IIC T4 Ga
Ex ia [ia] IIC T4 Ga
Class I, Division 1, Groups A,B,C & D, T4
Provides outputs to Class I, Division 1 [Ex ia]
- 40°C ≤ Ta ≤ + 70°C

Europe and Worldwide II 1 G Ex ia [ia] IIC T4 Ga
(ATEX and IECEx) - 40°C ≤ Ta ≤ + 70°C
ATEX Certificate No: **ITS18ATEX203161X**
IECEx Certificate No: **IECEx ETL 18.0007X**



Special Features


- High resolution ER measurement for rapid response
- Data storage capacity of 16,000 readings per probe on 250 different probes (4 million total)
- Backlit graphical LCD display (320 x 240 pixel resolution)
- On-screen charting
- Automatic data-logging
- Non-volatile Flash memory
- Multilingual menu (English, Spanish, Portuguese, French)
- Portable

Included Accessory Items

Carrying Case, Probe Cable (1' coiled - 6' extended), Meter Prover, Operation Manual, Corrosion Data Management Software, Protective Boot

Optional Accessory Items

Certified Data Transfer Unit
Certified USB Barrier



Metal Samples Company

A Division of Alabama Specialty Products, Inc.

152 Metal Samples Rd., Munford, AL 36268 Phone: (256) 358-4202 Fax: (256) 358-4515

E-mail: msc@alspi.com Internet: www.metalsamples.com

Houston Office: 6327 Teal Mist Lane, Fulshear, TX 77441 Phone: (832) 451-6825